


5MP, 4-in-1, True Wide Dynamic Box Camera

OSD, UTC, 3DNR - Lens Sold Separately

FEATURES:

- ◆ Up to 5MP Resolution (TVI/AHD)
- ◆ Multi Format (TVI, CVI, AHD, 960H)
- ◆ True 120dB Wide Dynamic Range
- ◆ True D/N Mechanical IR Cut Filter
- ◆ 12VDC/24VAC Dual Voltage Power
- ◆ Accepts C/CS Lenses (Lens Sold Separately)
- ◆ Back Panel & UTC Controllable OSD
- ◆ Adjustable Shutter Speed
- ◆ 3D Digital Noise Reduction
- ◆ Top & Bottom Mounting Holes
- ◆ Adjustable Back Focus
- ◆ Indoor Only

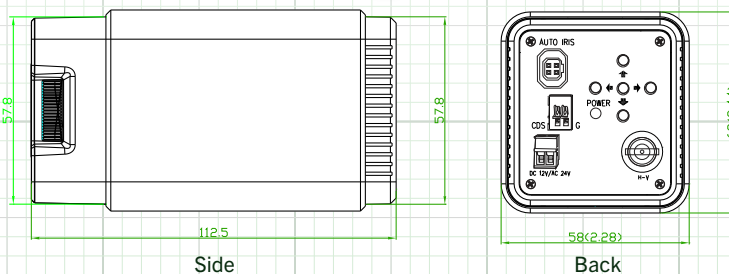


INCLUDED ACCESSORIES:

User Manual, C-CS Mounting Adapter, Power Connector.

OPTIONAL MOUNTING ACCESSORIES:

Metal Dual Option Camera Mounts

MCM6W - White Camera Mount with Wall/Ceiling & T-Bar Mount

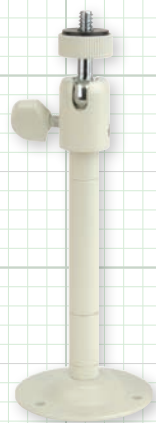

MCM6W



MCM6W - T-Bar Mount

SPECIFICATION	HDBXWDR
Image Sensor	1/2.8" Sony CMOS
Active Pixels	2688(H)×1944(V)
Resolution	Up to 5 Megapixel (5MP TVI/AHD), 4MP&2MP (TVI/AND/CVI), 960H
Resolution Default	TVI 1080p
Scanning System	Progressive Scan
OSD (On Screen Display)	Back Panel / UTC Controlled (coaxial control)
True WDR (Wide Dynamic Range)	120dB
3D Digital Noise Reduction	Yes (OFF / LOW / MIDDLE / HIGH)
Video Output	TVI, CVI, AHD & 960H (Selectable via OSD Menu)
Lens Type	Accepts C/CS Mount (CS Adapter Included)
Iris Type	DC Auto-Iris
Sense-up	Yes (x2 ~ x32 Adjustable) / OFF
Shutter Speed	Auto / FLK / Manual (1/30s ~ 1/30,000s)
IR Cut Filter	Yes - Built in Mechanical
Minimum Illumination	Color (0.03) / B&W (0.003 lux)
S/N Ratio	More than 52dB
Automatic Gain Control	Yes (0~10 Adjustable)
Sync System	Internal
White Balance	Yes AUTO / MANUAL (C-TEMP, R-GAIN / B-GAIN) Adjustable
Back Light Compensation	Yes ON/OFF (H/V Position & Size Adjustable)
HLC	Yes ON/OFF (Level & Color Adjustable)
Day/Night	Auto / COLOR / B&W / EXT / (D>N, N>D, Delay Adjustable)
Mirror	Yes
Digital Zoom	1x ~ 16X
Languages	ENG / CHN / CHN(S) / JPN / KOR
Brightness	Yes (1~20 Adjustable)
Motion Detection	Yes, 4-Zone Adjustable
Privacy Mask	Yes, 16-Zone Adjustable
Power Input	12 VDC±10%, 24 VAC±10%
Power Requirement	180mA
Overall Camera Dimensions	58×62×128mm (2.28"×2.44"×5.04")
Weight	Approx .85lb / 385g
Operating Temperature	-10°C ~ 60 °C (14°F ~ 140°F)
Weatherproof Rating	Indoor Only

Note: Specification subject to change without notice