


### N1202-1008

Revision: A

#### INDUSTRY APPROVALS

National Electrical Code  
 UL Standard 13  
 National Electrical Code  
 UL Standard 1424  
 EU Directive 2011/65/EU

Article 725  
 Type CL3P  
 Article 760  
 Type FPLP  
 RoHS Compliant

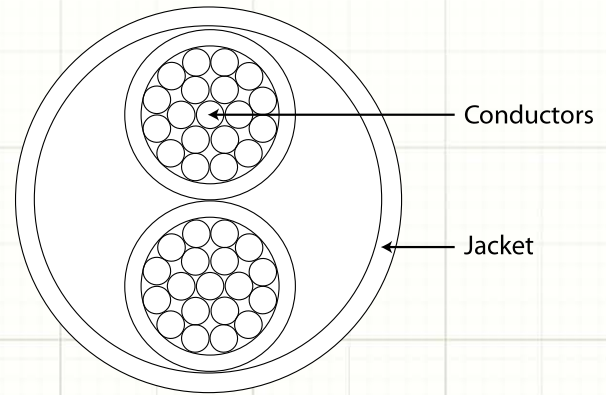

#### CONSTRUCTION

Component	Description	Specification
Conductor:	12 AWG (19/.0185) Bare Copper	0.089" Nominal diameter
Insulation:	0.011" Wall, FRPVC	0.111" Nominal diameter
Cable Assembly:	2 Conductors with a 7.50" LHL	0.224" Nominal diameter
Ripcord:	Yes	
Jacket:	0.014" Wall, FRPVC	0.252" ± .012" diameter
Sequential Footage		Every 2 feet
Print Legend:	NORTHERN (R) 12 AWG – N1202-1008 -- (UL FILE NUMBER) (UL) CL3P OR FPLP --- ROHS -- MADE IN USA (DATE CODE) (SEQ FT) (PRINT EVERY 2 FT)	

#### ELECTRICAL AND PHYSICAL PROPERTIES

Temperature:	-0°C to +75°C
Voltage:	300 Vrms (Maximum)
Conductor Resistance (DCR):	1.65 Ohms/1000ft (Maximum) @ 20°C
Capacitance (Cond-Cond):	38.0 pF/ft (Nominal) @ 1kHz
Characteristic Impedance:	51.0 Ohms (Nominal) @ 1MHz

#### CONDUCTOR COLOR CODE

Conductor	Color
1	Black
2	Red

#### JACKET COLOR AND PACKAGING

N1202 – 1008 – XX XX

Jacket color

Put-up

#### PUT-UP

11	1000 Foot reel
51	500 Foot reel

#### JACKET COLOR

01	White	05	Yellow	09	Gray(slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange	15	Natural

\* Some Put-Ups and Colors Require Special Order

