


### N1402-1008

Revision: A

#### INDUSTRY APPROVALS

National Electrical Code	Article 725
UL Standard 13	Type CL3P
National Electrical Code	Article 760
UL Standard 1424	Type FPLP
EU Directive 2011/65/EU	RoHS Compliant

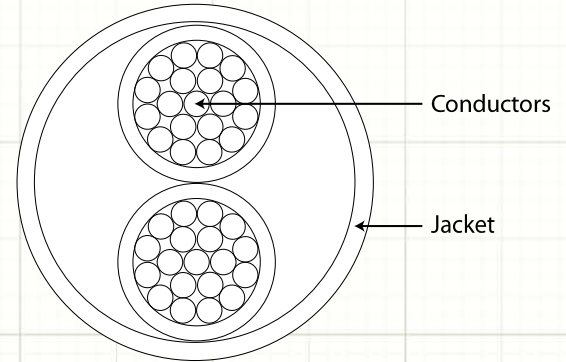

#### CONSTRUCTION

Component	Description	Specification
Conductor:	14 AWG (19/.0147) Bare Copper	0.071" Nominal diameter
Insulation:	0.010" Wall, FRPVC	0.091" Nominal diameter
Cable Assembly:	2 Conductors with a 8.00" LHL	0.182" Nominal diameter
Ripcord:	Yes	
Jacket:	0.015" Wall, FRPVC	0.212" ± .012" diameter
Sequential Footage		Every 2 feet
Print Legend:	NORTHERN (R) 14 AWG – N1402-1008 – (UL FILE NUMBER) (UL) CL3P OR FPLP-- ROHS -- MADE IN USA (date code - MM/YY) (sequential footage)	

#### ELECTRICAL AND PHYSICAL PROPERTIES

Temperature:	-0°C to +75°C
Voltage:	300 Vrms (Maximum)
Conductor Resistance (DCR):	2.62 Ohms/1000ft (Maximum) @ 20°C
Capacitance (Cond-Cond):	36.0 pF/ft (Nominal) @ 1kHz
Characteristic Impedance:	54.0 Ohms (Nominal) @ 1MHz

#### CONDUCTOR COLOR CODE

Conductor	Color
1	Black
2	Red

#### JACKET COLOR AND PACKAGING

N1402 – 1008 – XX XX

Jacket color / Put-up

#### PUT-UP

10	1000 Foot Box
11	1000 Foot Reel
50	500 Foot Box
51	500 Foot Reel

#### JACKET COLOR

01	White	05	Yellow	09	Gray(slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange	15	Natural

\* Some Put-Ups and Colors Require Special Order



Note: Specification subject to change without notice