


N1404-1206

Description:

14(41)BC 4 CONDUCTOR PVC/PVC MID FLEX SPEAKER CABLE CMR/CL3R/FT4

Industry Approvals:

National Electric Code	Article 800
UL Standard 444	Type CMR
National Electric Code	Article 725
UL Standard 13	Type CL3R
National Electric Code	Article 760
UL Standard 1424	Type FPLR

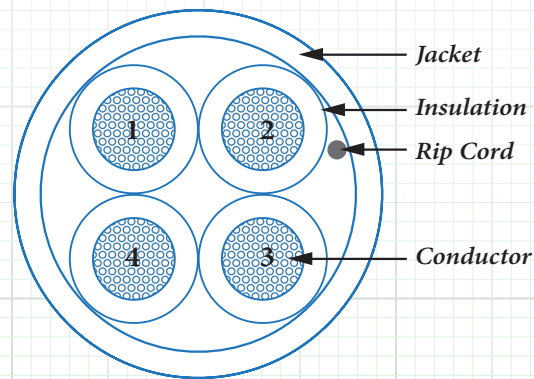

Electrical Performance:

Temperature Rating	-20° to 75°
Voltage Rating	300 Volt RMS
DC Resistance	2.62Ω/1000FT

Construction:

Conductor	4 Core (Strand)
Material	Oxygen Free Bare Copper
Size	14 AWG
Diameter	41 Strand

Jacket:

Material	PVC
Thickness	0.015"
Overall Diameter	0.260"
Rip Cord	Yes


Insulation:

Material	PVC
Diameter	0.0125"
Color	Red, Black, Green, White

Jacket Marking:

NORTHERN SPEAKER (Part#) E340599-19 75C c(UL)us CMR (mfg date and lot code) DEVICE A B C D E F ZONE 0 1 2 3 4 5 6 7 8 9 ****(FT)

Jacket Color and Put-up:



Put-Up:

10	1000 Foot Boxes
11	1000 Foot Reel
50	500 Foot Boxes
52	500 Foot Coil Packs

Jacket Color:

01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange		

Note: Specification subject to change without notice