


## N1404-1306

### Description:

14(105)BC 4 CONDUCTOR PVC/PVC HIGH FLEX SPEAKER CABLE CMR/CL3R/FT4

### Industry Approvals:

National Electric Code	Article 800
UL Standard 444	Type CMR
National Electric Code	Article 725
UL Standard 13	Type CL3R
National Electric Code	Article 760
UL Standard 1424	Type FPLR

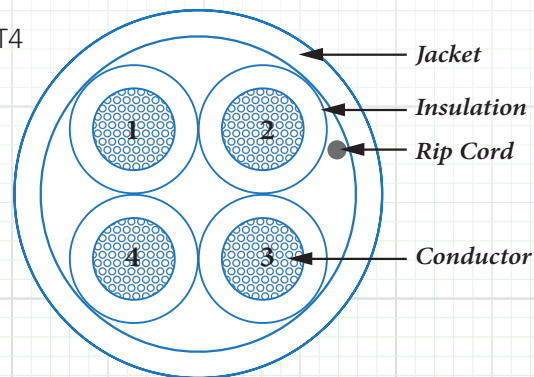

### Electrical Performance:

Temperature Rating	-20° to 75°
Voltage Rating	300 Volt RMS
DC Resistance	2.62Ω/1000FT at 20°C

### Construction:

Conductor	4 Core (Strand)
Material	Oxygen Free Bare Copper
Size	14 AWG
Diameter	105 Strand

### Jacket:

Material	PVC
Thickness	0.015"
Overall Diameter	0.260"
Rip Cord	Yes


### Insulation:

Material	PVC
Diameter	0.0945"
Color	Red, Black, Green, White

### Jacket Marking:

NORTHERN SPEAKER (Part#) E340599-19 75C c(UL)us CMR (mfg date and lot code) DEVICE A B C D E F ZONE 0 1 2 3 4 5 6 7 8 9 \*\*\*\*(FT)

### Jacket Color and Put-up:



### Put-Up:

10	1000 Foot Boxes
11	1000 Foot Reel
50	500 Foot Boxes
52	500 Foot Coil Packs

### Jacket Color:

01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange		

Note: Specification subject to change without notice