


## N2202-1008

### Description:

22(7)BC 4 CONDUCTOR FRPVC/FRPVC CMP/CL3P/FT6/FPLP

### Industry Approvals:

National Electric Code	Article 800
UL Standard 444	Type CMP
National Electric Code	Article 725
UL Standard 13	Type CL3P
National Electric Code	Article 760
UL Standard 1424	Type FPLP

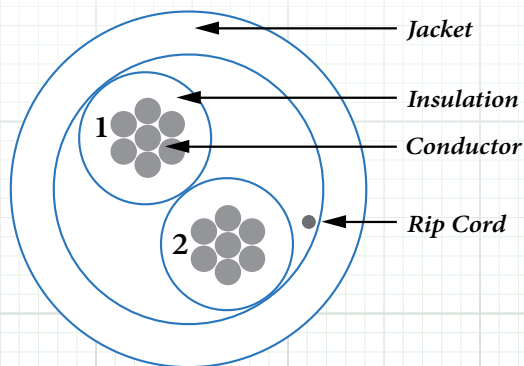

### Electrical Performance:

Temperature Rating	-20° to 75°
Voltage Rating	300 Volt RMS
DC Resistance	16.9Ω/1000FT at 20°

### Construction:

Conductor	2 Core (Strand)
Material	Oxygen Free Bare Copper
Size	22 AWG
Diameter	7/0.243mm

### Jacket:

Material	LSPVC
Thickness	0.015"
Overall Diameter	0.122"
Rip Cord	Yes

### Insulation:

Material	LSPVC
Diameter	0.0449"
Color	Red, Black

### Jacket Marking:

NORTHERN PART# E340599-19 75C c(UL)us CMP/CL3P/FPLP (mfg date and lot code) DEVICE A B C D E F ZONE 0 1 2 3 4 5 6 7 8 9 \*\*\*\*(FT)

### Jacket Color and Put-up:

2202 – 1008 – XX XX



### Put-Up:

10	1000 Foot Boxes
11	1000 Foot Reel
50	500 Foot Boxes
52	500 Foot Coil Packs

### Jacket Color:

01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange		

Note: Specification subject to change without notice