


N2204-1008

Description:

22(7)BC 4 CONDUCTOR FRPVC/FRPVC CMP/CL3P/FT6/FPLP

Industry Approvals:

National Electric Code	Article 800
UL Standard 444	Type CMP
National Electric Code	Article 725
UL Standard 13	Type CL3P
National Electric Code	Article 760
UL Standard 1424	Type FPLP

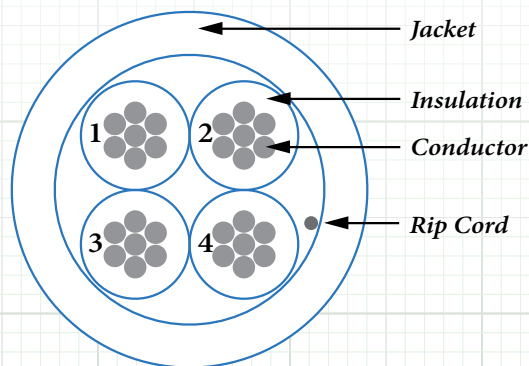

Electrical Performance:

Temperature Rating	-20° to 75°
Voltage Rating	300 Volt RMS
DC Resistance	16.9Ω/1000FT at 20°

Construction:

Conductor	4 Core (Strand)
Material	Oxygen Free Bare Copper
Size	22 AWG
Diameter	7/0.243mm

Jacket:

Material	LSPVC
Thickness	0.015"
Overall Diameter	0.142"
Rip Cord	Yes


Insulation:

Material	LSPVC
Diameter	0.0449"
Color	Red, Black, White, Green

Jacket Marking:

NORTHERN PART# E340599-19 75C c(UL)us CMP/CL3P/FPLP (mfg date and lot code) DEVICE A B C D E F ZONE 0 1 2 3 4 5 6 7 8 9 ****(FT)

Jacket Color and Put-up:



Put-Up:

10	1000 Foot Boxes
11	1000 Foot Reel
50	500 Foot Boxes
52	500 Foot Coil Packs

Jacket Color:

01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange		

Note: Specification subject to change without notice