


## 12VDC 4Ch/5Amp & 9Ch/10Amp PTC Fused Power Supplies with Optional Battery Backup

### FEATURES:

- ◆ 5 Amp Total Output (4 Ch)
- ◆ 10 Amp Total Output (9 Ch)
- ◆ 1.25 Amp / Channel (4 Ch)
- ◆ 1.1 Amp / Channel (9 Ch)
- ◆ Battery Type: 12VDC, 7Ah or 8Ah (not included)
- ◆ PTC Resettable Fuse Protection
- ◆ LED Channel Indicator
- ◆ Key & Lock Assembly Included
- ◆ Easy Connect 3-Prong Power Cord
- ◆ UL/CUL Certifications

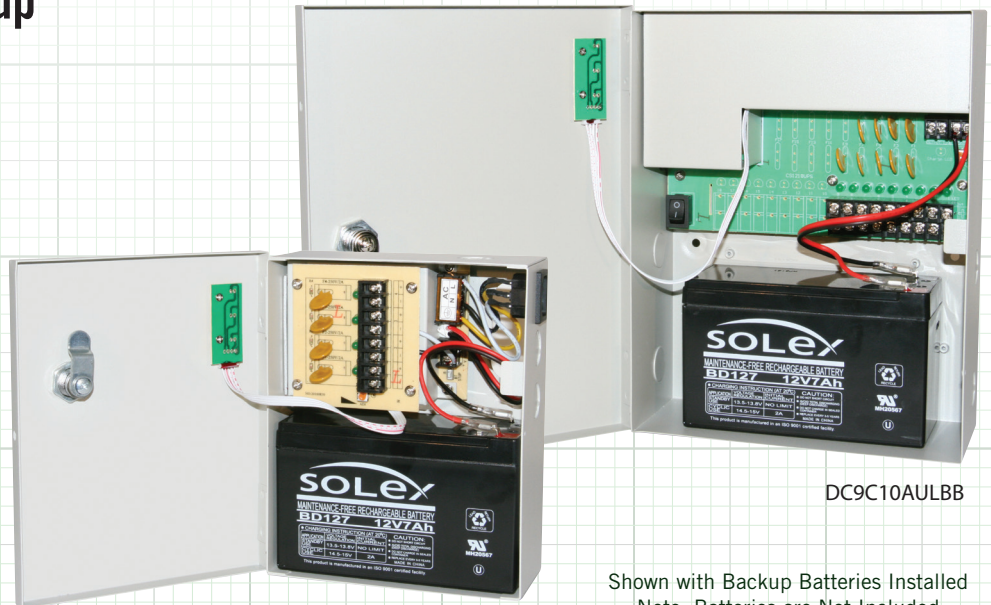

DC4C5AULBB


DC9C10AULBB

Shown with Backup Batteries Installed  
Note: Batteries are Not Included

### INCLUDED ACCESSORIES:

3-Prong Power Cord, Keys, Mounting Template,  
Mounting Hardware, Knockout Grommets,  
Door Screws

### OPTIONAL ACCESSORIES:

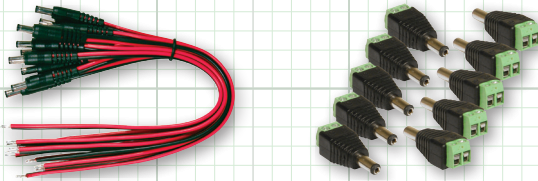

12VDCCORD10PK

12VDCCON10PKM

**12VDCCORD10PK** - DC Male with  
Screw Terminal Connection

**12VDCCON10PKM** - DC Male with 18 Gauge  
12" Bare Lead Connection

7AH BATTERY BACKUP DURATION		
Channels	Draw	Duration
4	500mA	3.5hr
9	500mA	1.55hr

SPECIFICATION	DC4C5AULBB	DC9C10AULBB
Input Voltage	AC 100~240V 50/60Hz	
Output Voltage	12 Volt DC	
Potentiometer	Yes - (Range of 10VDC ~14VDC)	
Output Current Per Channel	1.25Amp / Channel	1.1Amp / Channel
Output Fuse Protection	PTC Resettable Fuse	
Maximum Fuse Rating	1.6 Amp	
Channel LED Indicator	Yes	
Protections	Over Power, Over Current, Over Voltage, Short Circuit	
Internal ON/OFF Switch	No	Yes
Power Cord	Easy Connect 3-Prong	
Key/Lock Assembly	Included	
Housing Dimensions (HxWxD)	8.6" x 7.1" x 3.1" (220x180x80mm)	10.1" x 8.3" x 3.6" (266x211x92mm)
Housing Material / Color	Steel / Beige	
Housing Knockouts 1/2"	3 - Right Side	2 Right Side - 2 Left Side
Certification	UL/CUL, FCC, CE, ROHS	
Operating Temp	14°F ~ 104°F	
Weatherproof Rating	Indoor Only	
External LED Indicators	Yellow = Power, Green = DC12V, Red = Charge	
Battery Backup Type	12 Volt DC / 7Ah or 8Ah	
Battery Backup Size	101mm(H) x 151mm (W) x 65mm (D)	

Note: Specification subject to change without notice