

Security Rated 19" LED Monitor

HDMI, VGA & BNC Video Inputs, RCA & PC Audio Inputs




FEATURES:

- ◆ LED Backlight
- ◆ Low Power Consumption
- ◆ Includes 6' HDMI & VGA Cables
- ◆ Up to 1280 x 1024 Resolution
- ◆ 3D Comb Filter
- ◆ 3D De-Interlace
- ◆ 3D Digital Noise Reduction
- ◆ Super Fast 5ms Response Time
- ◆ HDMI & VGA Inputs
- ◆ Looping BNC Input
- ◆ RCA & PC Audio Inputs
- ◆ Full OSD Control of All Monitor Functions
- ◆ 5:4 Aspect Ratio
- ◆ Vesa Mounting (75 x 75)
- ◆ CE & FCC Certifications

INCLUDED ACCESSORIES:

1. 6' HDMI Cable
1. 6' VGA Cable
1. 3.5mm PC Audio Cable
1. Power Cord / Power Supply
1. User Manual

REAR PANEL CONNECTIONS:

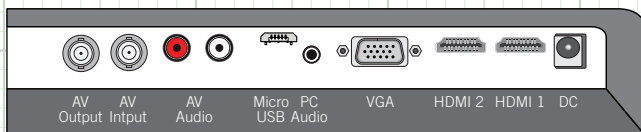

Note: Specification subject to change without notice

SPECIFICATION	LED19ST
Video System	NTSC/PAL (Auto Sensing)
Max Resolution	1280 x 1024 (Native)
Supported Resolutions	720x400; 640x480; 800x600; 1024x768; 1280x1024; 1920x1080 (Upscaled)
Video Connections	HDMI, VGA, BNC Input/Output
3D Comb Filter	Yes
3D De-Interlace	Yes
OSD (On Screen Display)	Yes
Backlight	LED
Active Display Area	19" Diagonal
Impedance	75 OHM Self Terminating
Video Input Signals	HDMI, VGA, Composite BNC
Aspect Ratio	5:4
Pixel Pitch	0.264
Color Depth	24 bits, 16.7 Million colors
Brightness	250 cd/m ²
Contrast Ratio	1000:1
Viewing Angle (H/V)	178°/178°
Response Time	5ms
Auto Adjustment	Yes
Certificates	CE, FCC, UL
Languages	English, Chinese, German, French, Spanish, Italian
Input Voltage	12VDC UL/CUL External Power Supply Included
Power Consumption	<25W
Audio Connections	RCA & PC Audio Inputs
Speakers	8Ω, 3 Watt per Channel
Dimensions with stand (H x W x D)	16.2" x 16.5" x 7.2"
Weight	10.5lb
Vesa Mounting	Yes (75 x 75)
Operating Temperature	32° ~ 104°(0°C ~ 40°C)

Monitor Dimensions:

