

## 21.5" Widescreen LED Security Monitor

with HDMI, VGA & BNC Inputs, RCA & PC Audio, IR Remote


### FEATURES:

- ◆ 16:9 Aspect Ratio
- ◆ 1920 x 1080 Max Resolution
- ◆ Super Fast 5ms Response Time
- ◆ LED Backlight
- ◆ IR Remote Included
- ◆ Includes 6' HDMI & VGA Cables
- ◆ 3D Digital Noise Reduction
- ◆ 3D De-Interlace
- ◆ 3D Digital Comb Filter
- ◆ HDMI & VGA Inputs
- ◆ Looping BNC Input
- ◆ RCA & PC Audio Inputs
- ◆ Low Power Consumption
- ◆ Full OSD Control of All Monitor Functions
- ◆ Vesa Mounting (100 x 100)
- ◆ CE & FCC Certifications

### INCLUDED ACCESSORIES:

1. 6' HDMI Cable
1. 6' VGA Cable
1. 3.5mm Stereo Audio Cable
1. Power Supply & Cord
1. IR Remote
1. User Manual

### REAR PANEL CONNECTIONS:

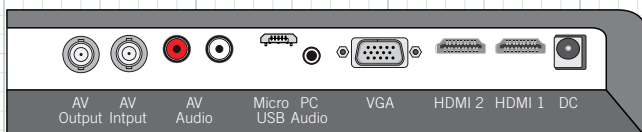

SPECIFICATION	LED22R
Video System	NTSC/PAL (Auto Sensing)
Max Resolution	1920 x 1080
Supported Resolutions	720x400; 640x480; 800x600; 1024x768; 1280x1024; 1366x768; 1440x900; 1600x900; 1680x1050; 1920x1080
3D Comb Filter	Yes
3D De-Interlace	Yes
OSD (On Screen Display)	Yes
Backlight	LED (RGB)
Active Display Area	21.5" Diagonal
Impedance	75 OHM Self Terminating
Video Input Signals	HDMI, VGA, Composite BNC
Video Connections	HDMI x2, VGA x1, BNC x1
Audio Connections	RCA x2, PC Audio x1
IR Remote	Yes - Included
Aspect Ratio	16:9
Pixel Pitch	0.275 x 0.275
Color Depth	Over 16 million colors
Brightness	280 cd/m2
Contrast Ratio	1000:1
Viewing Angle (H/V)	Vertical -80°~80° / Horizontal -85°~85°
Response Time	5 ms
Auto Adjustment	Yes
Certificates	CE, FCC
Languages	English, Japanese, Spanish, German, Italian, French, Russian, Dutch, Czech
Input Voltage	12 Volt DC, UL/CUL Power Supply Included
Power Consumption	30W Maximum
Dimensions (with stand) (W x H x D)	513 x 391 x 164 mm
Weight	8.6 lb
Vesa Mounting	Yes - 100 x 100
Operating Temperature	32° ~ 104°F

Note: Specification subject to change without notice

## Monitor Dimensions:

### LED22R

