


# HD Analog 3.5" Video Test Monitor with PTZ Controller & Cable Tester



INCLUDED PROTECTIVE CASE

HD3TM

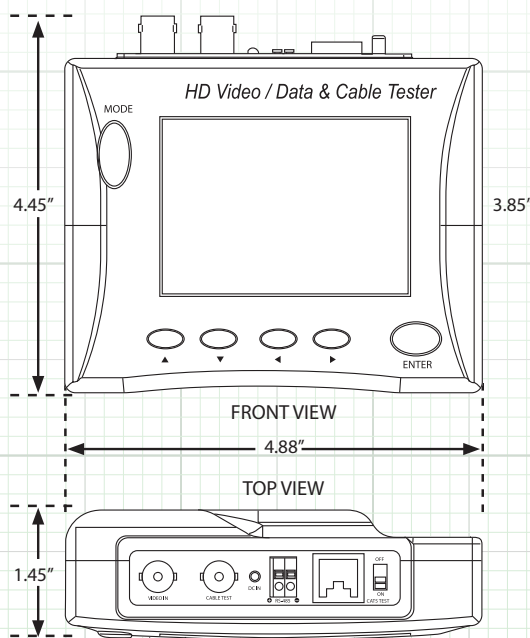

DIMENSIONS

SPECIFICATION	HD3TM
Panel Size	3.5 Inch Diagonal
Resolution	480(H)x235(V) Dot
Active Area	72.00(W)X50.544(H)mm
Dot Pitch	0.150(H)x0.216(V)mm
Video Formats	TVI 3.0, CVI 2.0, AHD 2.0 & 960H Compatible
View Angle	Top=10deg., Bottom=30deg., Left=40deg., Right=40.,
Panel Dimension	83(W) x 60.5(H) x 3.2(D)mm
Back Light	LED Type
Video Type	1.0Vp-p / 75Ω
Video System	NTSC / PAL Auto Switch
UTC Control (Up the COAX)	(Camera Dependent) For OSD Access of HD Analog Cameras
Input source	Built-in 1 BNC Connector/ RS485
Input Voltage	Built-in Battery or 12VDC Regulated Power Supply
Power Consumption	Normal : 12VDC, 170mA (2W) Charge : 12VDC, 1A (12W)
Working / Charge Time	6hr / 5hr
Low Voltage Triggering	10.7 V
System Cut off Voltage	9.3 V
Keypad Control	6 KEY ( MODE / UP / DOWN / LEFT / RIGHT / ENTER KEY )
Operating Temperature	32°F ~ 122°F
Weight	11 Oz

Note: Specification subject to change without notice

## FEATURES

- ◆ Multi Format (TVI, CVI, AHD, 960H)
- ◆ 480 x 235 Resolution
- ◆ BNC Video & CAT5 Cable Tester
- ◆ PTZ Control & Setup
- ◆ 6-Hour 2200mA Rechargeable Battery
- ◆ Includes Battery Charger & Case

## INCLUDED ACCESSORIES

- (1) Monitor
- (1) Power Adaptor
- (1) Cable Tester
- (2) BNC Converter
- (1) DC Plug to DC Plug Cable
- (1) AV Cable
- (1) User's Manual
- (1) Protective Carrying Case