

21.5" Widescreen LED Security Monitor w/HDMI, VGA & BNC Video Inputs, PC Audio In/Output

FEATURES:


- ◆ 16:9 Aspect Ratio
- ◆ 1360 x 768 Max Resolution (LED18)
- ◆ 1920 x 1080 Max Resolution (LED22)
- ◆ Super Fast 5ms Response Time
- ◆ LED Backlight
- ◆ Built-in Power Supply
- ◆ 3D Comb Filter & 3D De-Interlace
- ◆ Includes 6' HDMI & VGA Cables
- ◆ 3D Digital Noise Reduction
- ◆ HDMI Input
- ◆ VGA & Looping BNC Inputs
- ◆ PC Audio Input/Output
- ◆ Low Power Consumption
- ◆ Full OSD Control of All Monitor Functions
- ◆ Vesa Mounting (100 x 100)
- ◆ CE, FCC & UL Certifications



INCLUDED ACCESSORIES:

1. 6' HDMI Cable
1. 6' VGA Cable
1. 3.5mm Stereo Audio Cable
1. Power Cord
1. User Manual

REAR PANEL CONNECTIONS:

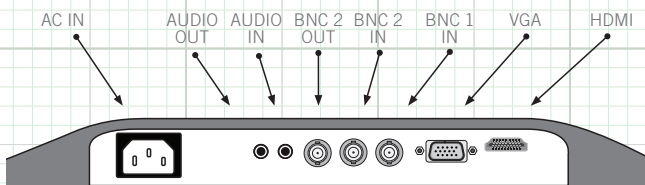

Note: Specification subject to change without notice

SPECIFICATION	LED22
Video System	NTSC/PAL (Auto Sensing)
Max Resolution	1920 x 1080
Supported Resolutions	720x400; 640x480; 800x600; 1024x768; 1280x1024; 1360x768; 1440x900; 1600x900; 1680x1050; 1920x1080
3D Comb Filter	Yes
3D De-Interlace	Yes
OSD (On Screen Display)	Yes
Backlight	LED (RGB)
Active Display Area	21.5" Diagonally
Impedence	75 OHM Self Terminating
Video Input Signals	HDMI, VGA, Composite BNC
Aspect Ratio	Selectable 16:9 or 4:3 in OSD or by One Touch Instant Scaling
Pixel Pitch	0.248
Color Depth	Over 16 million colors
Brightness	250 CD/m ²
Contrast Ratio	2000:1
Viewing Angle (H/V)	(170/160)
Response Time	5ms
Auto Adjustment	Yes
Certificates	UL, CUL, CE, FCC, HDMI Forum
Languages	English, Chinese, German, French, Spanish, Italian
Input Voltage	100 ~ 240VAC (detachable USA line cord provided)
Power Consumption	< 30W
Video Connections	HDMI, VGA, BNC 1 Input, BNC 2 Input/Output
Audio Connections	RCA & PC Audio Inputs
Dimensions (with stand) (H x W x D)	14.81 x 20.34 x 7.28
Weight	8.75lb
Vesa Mounting	Yes (100 x 100)
Operating Temperature	32° ~ 104°F

Monitor Dimensions:

