

For TVI Camera Models: TVIVFBIR120, TVIVFDIR120, TVITIR120, TVID212IR2



TVIVFBIR120



TVIVFDIR120

USERS MANUAL



TVITIR120



TVID212IR2

User Manual

Thank you for purchasing our product. If there are any questions, or requests, do not hesitate to contact technical support at 855-388-7422.

This manual applies to HD 1080p Ultra Low-Light Cameras.

This manual may contain several technically incorrect places or printing errors. The content is subject to change without notice, and the updates will be added to the new version of this manual. We will readily improve or update the products or procedures described in the manual.

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under EMC Directive

2014/30/EU, the RoHS Directive 2011/65/EU.

2012/19/EU (WEEE directive): Products marked



with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment,

or dispose of it at designated collection points. For more information see: www.recyclethis.info.

2006/66/EC (battery directive): This product contains a battery



that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information.

The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info.

Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (A)/NMB-3(A) standards requirements.

Safety Instruction

These instructions are intended to ensure that user can use the product correctly to avoid danger or property loss.

The precaution measure is divided into “Warnings” and “Cautions”

Warnings: Serious injury or death may occur if any of the warnings are neglected.

Cautions: Injury or equipment damage may occur if any of the cautions are neglected.

	
Warnings Follow these safeguards to prevent serious injury or death.	Cautions Follow these precautions to prevent potential injury or material damage.



Warnings

- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region.
- Refer to technical specifications for detailed information.
- Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 24 V AC or 12 V DC according to the IEC60950-1 standard. Refer to technical specifications for detailed information.

- Make sure that the plug is firmly connected to the power socket.
- When the product is mounted on wall or ceiling, the device shall be firmly fixed.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cable and then contact the service center.
- If the product does not work properly, contact your dealer or the nearest service center. Never attempt to disassemble the camera yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)



Cautions

- Make sure the power supply voltage is correct before using the camera.
- Do not drop the camera or subject it to physical shock.
- Do not touch sensor modules with fingers. If cleaning is necessary, use clean cloth with a bit of ethanol and wipe it gently. If the camera will not be used for an extended period, replace the lens cap to protect the sensor from dirt.
- Do not aim the camera at the sun or extra bright places. Blooming or smearing may occur otherwise (which is not a malfunction), and affect the endurance of sensor at the same time.
- The sensor may be burned out by a laser beam, so when any laser equipment is in using, make sure that the surface of sensor will not be exposed to the laser beam.
- Do not place the camera in extremely hot, cold, dusty or damp locations, and do not expose it to high electromagnetic radiation.

- To avoid heat accumulation, good ventilation is required for operating environment.
- While in delivery, the camera shall be packed in its original packing, or packing with the same protection.

Table of Contents

Chapter 1 Introduction	8
1.1 Product Features	8
1.2 Overview of TVIVFDIR120 Outdoor Dome Camera	9
1.3 Overview of TVID212IR2 Indoor Dome Camera	10
1.4 Overview of TVIVFBIR120 Outdoor Bullet Camera.....	10
1.5 Overview of TVITIR120 Outdoor Turret Camera	11
Chapter 2 Installation	12
2.1 TVIVFDIR120/TVID212IR2 Installation	12
2.1.1 Ceiling Mounting	12
2.1.2 In-Ceiling Mounting.....	15
2.2 TVIVFBIR120 Camera Installation	17
2.2.1 Ceiling Mounting	17
2.2.2 Mounting with Junction Box	21
2.3 TVITIR120 Camera Installation.....	22
2.3.1 Ceiling Mounting	22
Chapter 3 Menu Operation	26
3.1 VIDEO OUT	28
3.2 LANGUAGE	28
3.3 SET UP	28
3.3.1 SMART FOCUS	28
3.3.2 SCENE	29
3.3.3 LENS	29
3.3.4 EXPOSURE	30
3.3.5 BACKLIGHT	32
3.3.6 WHITE BALANCE	35
3.3.7 DAY & NIGHT	36
3.3.8 SPECIAL.....	36

3.3.9	ADJUST	40
3.3.10	RESET.....	41
3.3.11	EXIT	41

Chapter 1 Introduction

1.1 Product Features

The camera is applicable for both indoor and outdoor conditions, and the application scenarios include road, warehouse, underground parking lot, bar, etc.

The main features are as follows:

- High performance CMOS sensor
- 1080p resolution
- Starlight Ultra low-light: 0.003 Lux@(F1.2, AGC ON), 0 Lux with IR
- OSD menu, white balance, auto gain, backlight compensation, electronic shutter, ect.
- 2D & 3D DNR
- IR cut filter
- Semi-auto focus
- Remote parameters configuration and upgrade
- External alarm in/out

Note:

Some mode(s) of type II camera is applicable for indoor only.

1.2 Overview of TVIVFDIR120 Outdoor Dome Camera

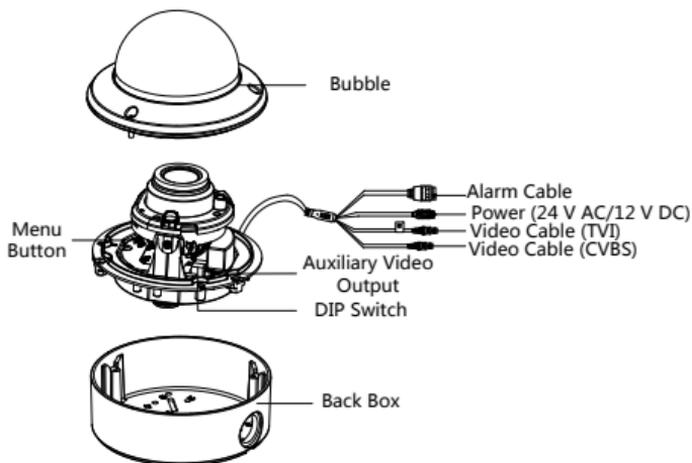


Figure 1. 1 Overview of TVIVFDIR120 Outdoor Dome Camera

1.3 Overview of TVID212IR2 Indoor Dome Camera

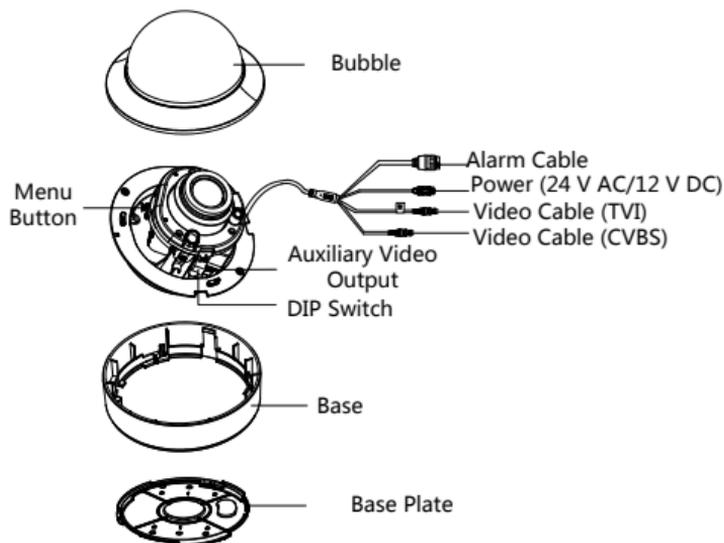


Figure 1. 2 Overview of TVID212IR2 Indoor Dome Camera

1.4 Overview of TVIVFBIR120 Outdoor Bullet Camera

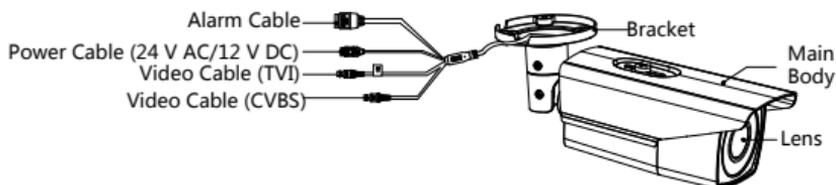


Figure 1. 3 Overview of TVIVFBIR120 Outdoor Bullet Camera

1.5 Overview of TVITIR120 Outdoor Turret Camera

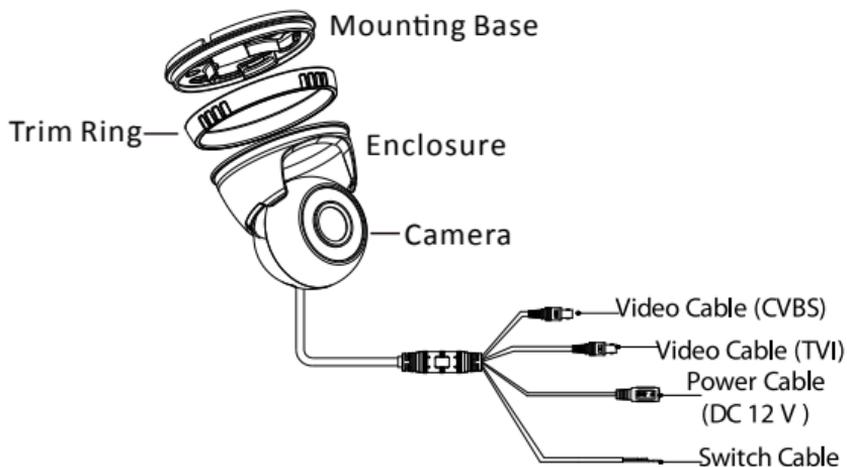


Figure 1. 4 Overview of TVITIR120 Outdoor Turret Camera

Chapter 2 Installation

Before you start:

- Make sure that the device in the package is in good condition and all the assembly parts are included.
- Make sure that all the related equipment is power-off during the installation.
- Check the specification of the products for the installation environment.
- Check whether the power supply is matched with your power output to avoid damage.
- Make sure the wall is strong enough to withstand three times the weight of the camera and the mounting bracket.
- If the wall is cement, insert expansion screws before installing the camera. If the wall is wooden, use self-tapping screw to secure the camera.
- If the product does not function properly, contact your dealer or the nearest service center. Do not disassemble the camera for repair or maintenance by yourself.

2.1 TVIVFDIR120/TVID212IR2 Installation

2.1.1 Ceiling Mounting

Steps:

1. Attach the drill template to the ceiling.
2. Drill screw holes and the cable hole (optional) on the ceiling according to the supplied drill template.

Note:

Cable hole is required when you adopts ceiling outlet to route the cables.

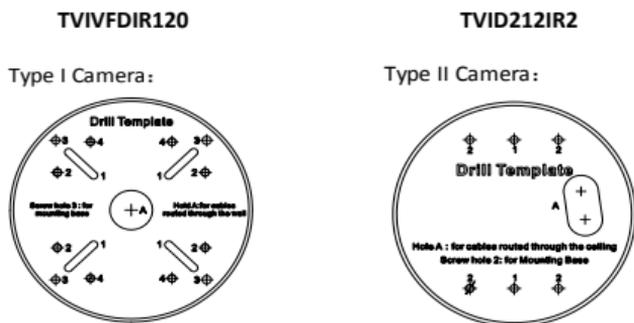


Figure 2. 1 The Drill Template

3. Loosen the screws on the bubble of the dome camera to remove the bubble and the black liner.
4. Attach the back box of type I camera/base plate of type II camera to the ceiling and secure them with supplied screws.

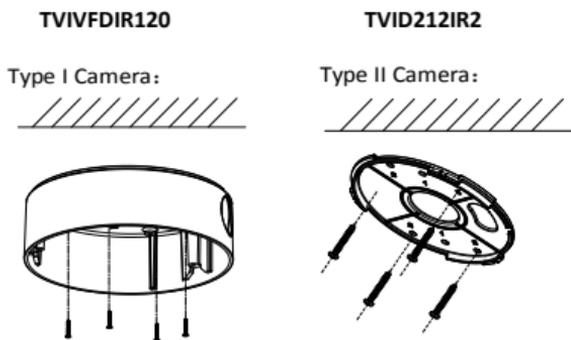


Figure 2. 2 Attach the Back Box/Base Plate

Note:

- In the supplied screw package, both self-tapping screws and expansion blots are contained.
 - If the wall is cement, expansion blots are required to fix the camera. If the wall is wooden, self-tapping screws are required.
5. Route the cables through the cable hole or the side opening.
 6. Align the camera with the back box/base plate, and tighten the screws to secure the camera with the back box/base plate.


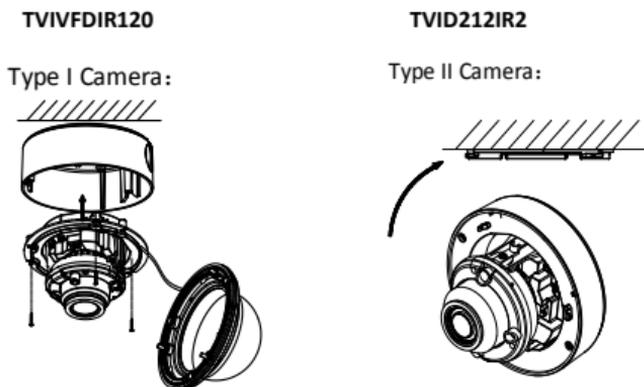


Figure 2. 3 Fix the camera to the Ceiling

7. Connect the corresponding cables, such as power cable and video cable.
8. Power on the camera to check whether the image on the monitor is gotten from the optimum angle. If not, adjust the camera according to the figure below to get an optimum angle.

TVIVFDIR120

Type I Camera:



TVID212IR2

Type II Camera:

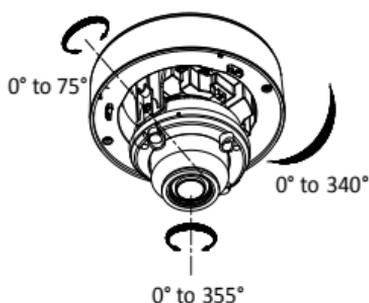


Figure 2. 4 3-Axis Adjustment

9. Fit the black liner on the camera and tighten the screws on the bubble of the dome camera to finish the installation.

2.1.2 In-Ceiling Mounting

Note:

You need to purchase an in-ceiling mounting bracket separately if you adopt the in-ceiling mounting.

Steps:

1. Attach the drill template on the ceiling.
2. Drill the screw holes and cable holes (optional) in the ceiling according to the supplied drill template.

Note:

Cable hole is required when adopting ceiling outlet to route the cable.

3. Screw the bolts through the mounting bracket by aligning with the 2 bolt holes. Fit the toggles onto the bolts.

4. Push the two toggles through the two screw holes in the ceiling. Rotate the bolt till the toggle holds the ceiling tightly.

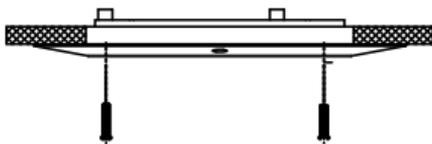


Figure 2. 5 Install the In-Ceiling Mounting Bracket

5. Route the cables through the cable hole.
6. Attach the back box of type I camera/base plate of type II camera to the in-ceiling mounting bracket with the supplied screws.

Note:

- In the supplied screw package, both self-tapping screws and expansion blots are contained.
- If the wall is cement, expansion blots are required to fix the camera. If the wall is wooden, self-tapping screws are required.

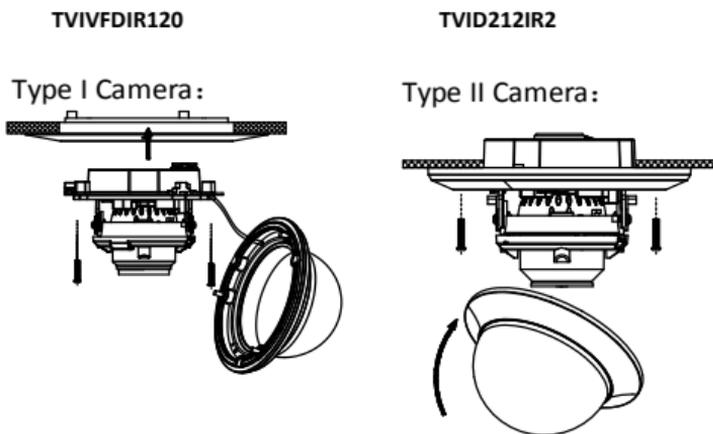


Figure 2. 6 Fix the Camera to the Mount

7. Repeat steps 6 to 9 of the *2.1.1 Ceiling Mounting* section to complete the installation.

2.2 TVIVFBIR120 Camera Installation

2.2.1 Ceiling Mounting

Note:

Both wall mounting and ceiling mounting are suitable for the bullet camera. Ceiling mounting will be taken as an example in this section. And you can take steps of ceiling mounting as a reference for wall mounting.

Steps:

1. Attach the drill template on the ceiling.

TVIVFBIR120

Type III Camera

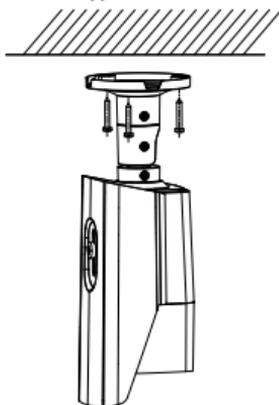


Figure 2. 8 Fix the Camera to the Ceiling

8. Connect the corresponding cables, such as power cable, and video cable

Note:

- In the supplied screw package, both self-tapping screws and expansion blots are contained.
- If the wall is cement, expansion blots are required to fix the camera. If the wall is wooden, self-tapping screws are required.
- Rotate the cover counterclockwise to separate the cover from the camera, where you can view the auxiliary video output, menu button, and DIP switch shown as the figure 2.15.
- The DIP switch is used to turn on or off the WDR. CVBS video output is not available, when the WDR is turned on.

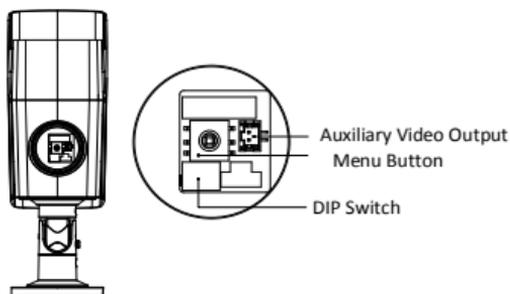


Figure 2. 9 Internal Interface and Button

9. Power on the camera to check whether the image on the monitor is gotten from the optimum angle. If not, adjust the surveillance angle.
 - 1) Loosen the No.1 adjusting screw to adjust the pan position [0° to 360°].
 - 2) Tighten the No.1 adjusting screw.
 - 3) Loosen the No.2 adjusting screw to adjust the tilting position [0° to 90°].
 - 4) Tighten the No. 2 adjusting screw.
 - 5) Loosen the No.3 adjusting screw to adjust the rotation position [0° to 360°].
 - 6) Tighten the No.3 adjusting screw.

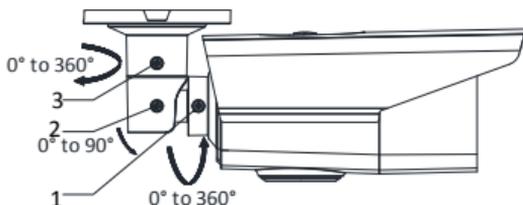


Figure 2. 10 3-Axis Adjustment

2.2.2 Mounting with Junction Box

Note:

You need to purchase a junction box separately if you adopt the mounting with a junction box.

Steps:

1. Attach the drill template on the wall/ceiling.
2. Drill screw holes and the cable hole in the wall/ceiling according to the holes of the drill template.
3. Attach the junction box to the wall/ceiling by aligning the screw holes of the junction box.
4. Secure the junction box with the PA4 × 25 screws on the wall/Ceiling.




Figure 2. 11 Install the Junction Box

5. Route the cables through the cable hole.

- Secure the camera with M4 × 10 screws on the junction box.

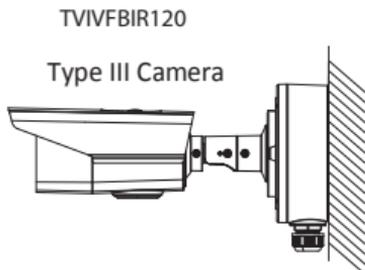


Figure 2. 12 Wall/Ceiling Mounting with the Junction Box

- Repeat steps 5 to 6 of the 2.2.1 Ceiling Mounting to install the camera to complete the installation.

2.3 TVITIR120 Camera Installation

2.3.1 Ceiling Mounting

Steps:

- Rotate the trim ring counterclockwise to remove it from the camera. See Figure 2. 13.

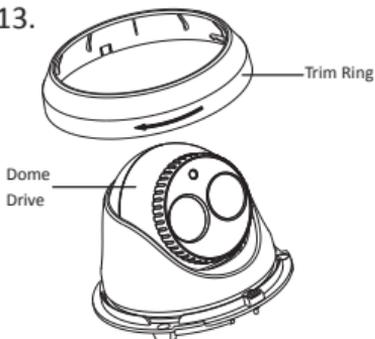


Figure 2. 13 Disassemble the Camera

2. Attach the drill template (supplied) to the place where you want to install the camera, and then drill the screw holes and the cable hole (optional) on the ceiling according to the drill template. The cable can also be routed through the side. Use pliers to remove the plastic tab if routing cables through side outlet on trim ring.



Note:

Cable hole is required when adopting ceiling outlet to route the cable.

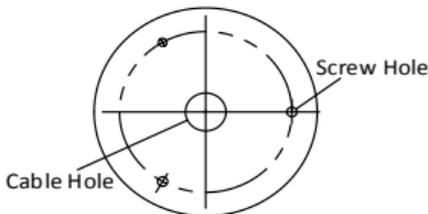


Figure 2. 14 Drill Template

3. Connect the corresponding power and video cables and route them as desired.
4. Secure the camera to the ceiling with the supplied expansion screws

Note:

- In the supplied screw package, both self-tapping screws and expansion blots are contained.

- If the wall is cement, expansion bolts are required to fix the camera. If the wall is wooden, self-tapping screws are required.

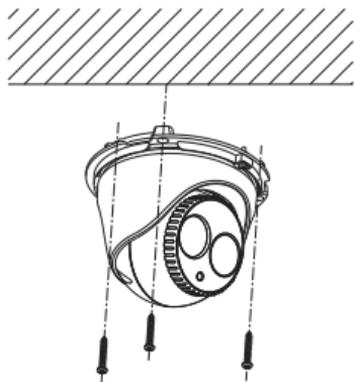


Figure 2. 15 Secure the camera to the Ceiling

5. Adjust the viewing angle of the camera.
 - 1). Loosen the Lock Screw.
 - 2). Rotate the enclosure to adjust the pan and tilt angle.
 - 3). Tighten the lock screw to secure the viewing angle.
 - 4). Attach trim ring to the camera and rotate clockwise to secure.

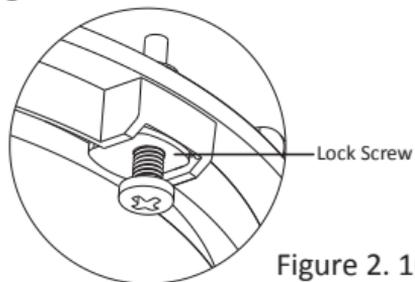


Figure 2. 16 Lock Screw



Figure 2. 17 Adjust the viewing angle



Figure 2. 18 Install the Trim Ring

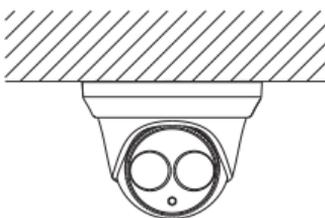


Figure 2. 19 Complete the Installation

Chapter 3 Menu Operation

Two methods are available to call the menu. This section takes method b) as an example to state the menu operation.

- a) Call the menu by pressing the joystick button (TVIVFBIR120/TVIVFDIR120/TVID212IR2 only)
- b) Call the menu with supported DVR/TVI DVR by clicking  button on the PTZ interface, or by calling preset No. 95.

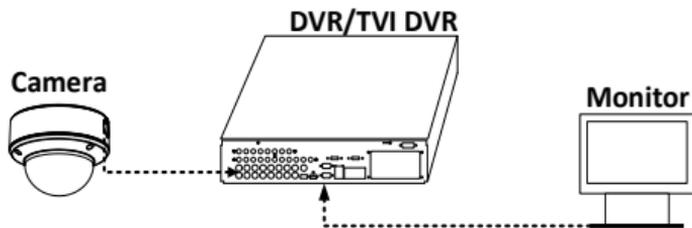


Figure 3. 1 Connection

1. After the connection is done, power on the analog camera, DVR/TVI DVR, and the monitor to view the image on the monitor.
2. Click PTZ Control to enter the PTZ Control Interface.
3. Call the camera menu by clicking , or calling preset No. 95.
4. Click up/down direction button to select the item, click Iris + to confirm the selection, and click left/right direction button to adjust the value of the selected item.

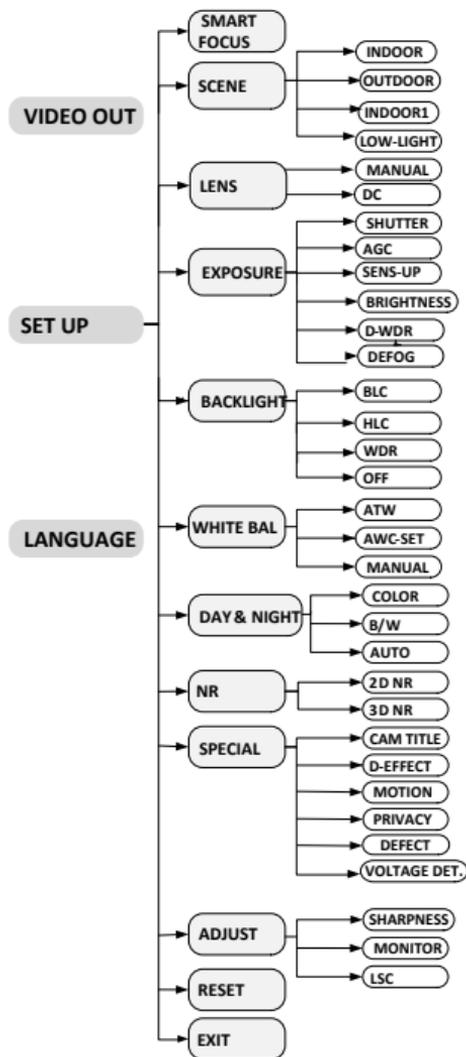


Figure 3. 2 Menu Tree

Note:

TVITIR120 does not support **SMART FOCUS**.

3.1 VIDEO OUT

PAL: (Phase Alternating Lines) is a color encoding system for analog television used in broadcast television systems in most countries.

NTSC: (National Television System Committee) is the analog television system that is used in most of North America, parts of South America, Myanmar, South Korea, etc.

3.2 LANGUAGE

Supports multiple languages, as English, Japanese, Chinese, etc..

3.3 SET UP

3.3.1 SMART FOCUS

You are allowed to adjust the focus by clicking ZOOM+, or ZOOM-.

Note:

- You need to adjust the focus, when the image is defocused.

- **SMART FOCUS** available on TVIVFBIR120 TVIVFDIR120 and TVID212IR2 models only.
- Adjusting the lens when using the 960H output requires pressing the joystick to call the menu, then entering Smart Focus. Press the joystick up and down to Zoom in or Out. Press the joystick left or right for fine focus.

3.3.2 SCENE

You can select **INDOOR**, **OUTDOOR**, **INDOOR 1**, and **LOW LIGHT** as the working environment.

INDOOR: Applicable to the indoor environment whose color temperature changes are relatively slight.

OUTDOOR: Applicable to the outdoor environment whose color temperature changes are relatively obvious.

INDOOR1: Applicable to the indoor environment with the strong light. Under this circumstance, WDR is ON by default.

LOW LIGHT: Applicable to the environment with the low light. Under this circumstance, the slow shutter is ON by default to receive more light.

3.3.3 LENS

The camera is equipped with manual lens, and DC lens.

Indoor mode and outdoor mode are available for the DC lens.

Click **IRIS SCAN** to initialize the lens.

3.3.4 EXPOSURE

Exposure describes the brightness-related parameters. You can adjust the image brightness by the SHUTTER, AGC, SENS-UP, BRIGHTNESS, and D-WDR in different light conditions.

EXPOSURE	
1. SHUTTER	AUTO
2. AGC	OFF
3. SENS-UP	---
4. BRIGHTNESS	--- ----- 40
5. D-WDR	OFF
6. DEFOG	
7. RETURN	RET

Figure 3. 3 Exposure

SHUTTER: Shutter denotes the speed of the shutter.

PAL: AUTO, 1/25 s, 1/50 s, FLK, 1/200 s, 1/400 s, 1/1k s, 1/2k s, 1/5k s, 1/10k s, and 1/50k s are selectable.

NTSC: AUTO, 1/30s, 1/60s, FLK, 1/240s, 1/480s, 1/1k s, 1/2k s, 1/5k s, 1/10k s, and 1/50k s are selectable.

Note:

- You are not allowed to set the slow shutter, when AGC is OFF.
- If you select shutter as AUTO or 1/25, the SENS-UP is adjustable (OFF/AUTO), and the SENS-UP is disabled if any other shutter speed is selected.

AGC: It's a form of amplification where the camera will automatically boost the image output signal to optimize the clarity of image in poor light conditions. You can set the AGC value from 0 to 15. The AGC is disabled if the value is set to 0.

Note:

The noise will be amplified if the AGC is on.

SENS-UP: Sense up increases the exposure on a signal frame, which makes a camera more sensitive to light so it can produce images even in low lux conditions. You can set the SENS-UP as OFF or AUTO according to different light conditions.

OFF: SENS-UP function is disabled.

AUTO: The SENS-UP function will automatically adjust itself to x2, x4, x6, x8, x10, x15, x20, x25, and x30 according to the different light conditions.

BRIGHTNESS: Brightness refers to the brightness of the image. You can set the brightness value from 1 to 100 to darken or brighten the image. The higher the value, the brighter the image is.

D-WDR: The digital wide dynamic range helps the camera provide clear images even under backlight circumstances. When there are both very bright and very dark areas simultaneously in the field of view, D-WDR balances the brightness level of the whole image and provide clear images with details.

Set the D-WDR as ON to improve the image quality under the backlight environment.

Set the D-WDR as OFF to disable the function.

DEFOG: DEFOG is used in special environment such as the foggy or rainy weather or in high illumination, in which the dynamic range is lower than that in the ordinary environment and the image always appear hazy. Enable the defog function can enhance the subtle details so that the image appears clearer. Set defog as ON to enable the function. Position, size, and the defog gradation are configurable.

DEFOG	
1. POS/SIZE	←↵
2. GRADATION	LOW
3. DEFAULT	←↵
4. RETURN	RET

Figure 3. 4 DEFOG

3.3.5 BACKLIGHT

Backlight is applicable for the backlight or the high luminance environment. You can set the Backlight to BLC, HSBL, and WDR.

BLC (Backlight Light Compensation): If there's a strong backlight, the object in front of the backlight will appear silhouetted or dark. Based on the back area, BLC enhances the brightness of the whole image, which makes it possible to see the area in the strong backlight clearly, but the backlight area will be over-exposed.

GAIN: The gain of BLC can be set as High, Middle, or Low, the higher the gain, and the clearer the image is.

AREA: Click the up/down/left/right button to define the BLC position and size. Select RET to go back to the BLC menu or re-define the BLC area.

DEFAULT: Restore the BLC settings to the default.

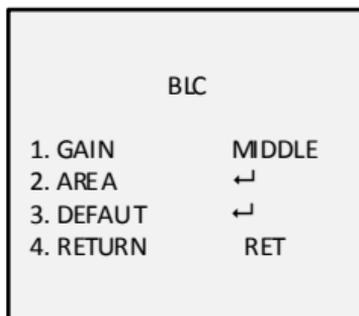


Figure 3. 5 BLC

HLC (High Light Compensation): Masks strong light sources that usually flare across a scene. This makes it possible to see the detail of the image that would normally be hidden.

GAIN: The gain of HLC can be set as High, Middle, or Low, the higher the gain, and the clearer the image is.

AREA: Click the up/down/left/right button to define the HLC position and size. Select RET to go back to the HLC menu or re-define the BLC area.

DEFAULT: Restore the HLC settings to the default.

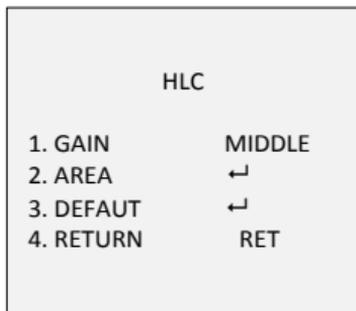


Figure 3. 6 HLC

WDR (Wide Dynamic Range): Balances the brightness level of the whole image, and provide the clear image with details.

Note:

WDR is available for TVI output only.

Turning WDR “ON” will disable the 960H output. If using the 960H output and WDR is turned on you will lose picture and not be able to access the OSD menu. If this occurs you need to flip the internal switch located next to the video test output on the TVIVFBIR120, TVIVFDIR120, and TVID212IR2 models. The TVITIR120 does not include a joystick for OSD – in order to turn WDR off on the TVITIR120 when in 960 model you will need to connect the two bare lead wires on the cable harness – doing this will turn WDR off and return your 960H picture

GAIN: Set the gain of WDR as high, middle, or low. The higher the gain is, and the clearer the image is.

WDR BRIGHT: You can set the value from 0 to 60. The higher the value, the brighter the image is.

WDR OFFSET: You can set the value from 0 to 60. The higher the value, the vaguer the image is.



Figure 3. 7 WDR

3.3.6 WHITE BALANCE

White balance is the white rendition function of the camera to adjust the color temperature according to the environment. It can remove the unrealistic color casts in the image.

MANUAL, ATW (Auto-Tracking White Balance), AWC→SET are selectable.

Manual: Allows you to adjust the white balance by customizing the BLUE and RED value, which range from 1 to 100.

ATW: Refers to the white balance is continuously being adjusted in real-time according to the color temperature of the scene illumination.

AWC→SET: Similar with ATW, the white balance is continuously being adjusted in real-time according the scene if AWC→SET is selected, however, if the scene changed, you have to go to

AWC→SET to get another proper white balance for the new scene.

3.3.7 DAY & NIGHT

Color, B/W, and AUTO are selectable for DAY & NIGHT switch.

COLOR: the image is colored in day mode all the time.

B/W: the image is black and white all the time, and the IR LED turns on in the low-light conditions.

AUTO: The image switches from color to B/W or from B/W to color automatically according to the light condition. And you can select to turn on or turn off the IR LED according to different illuminations.

3.3.8 SPECIAL

In the SPECIAL sub-menu, you can set the camera title, the digital effect of the image, the motion detection, privacy mask, dead pixel correction of the camera.

CAMERA TITLE: Edit the camera title on this section.

D-EFFECT : OFF, MIRROR, V-FLIP, and ROTATE are selectable for the mirror.

OFF: The mirror function is disabled.

MIRROR: The image flips 180 degree horizontally.

V-FLIP: The image flips 180 degree vertically.

ROTATE: The image flips 180 degree both horizontally and vertically.

SPECIAL	
1. CAM TITLE	ON ↵
2. D-EFFECT	↵
3. MOTION	OFF
4. PRIVACY	OFF
5. DEFECT	↵
6. VOLTAGE DETECCION	ON
7. RETURN	RET

Figure 3. 8 Special

MOTION: In the user-defined motion detection surveillance area, the moving object can be detected and the alarm will be triggered.

Select a MOTION area. Set the DISPLAY status as ON or OFF. Click the up/down/left/right button to define the position and size of the area. Set the SENSITIVITY from 0 to 100. Set the MOTION VIEW as ON or OFF.

MOTION	
1. SELECT	AREA 1
2. DISPLAY	ON↵
3. SENSITIVITY	-- -- 30
4. MOTION VIEW	ON
5. DEFAULT	↵
6. RETURN	RET

Figure 3. 9 Motion

PRIVACY: The privacy mask allows you to cover certain areas which you don't want to be viewed or recorded. Up to 8 privacy areas are configurable.

PRIVACY	
1. SELECT	AREA 1
2. DISPLAY	MOSAIC ←↵
3. COLOR	10
4. TRANS.	1
5. DEFAULT	↵
6. RETURN	RET

Figure 3. 10 Privacy

Select a PRIVACY area. Set the DISPLAY status as INV, MOSAIC, COLOR, or OFF. Click up/down/left/down button to define the position and size of the area.

VOLTAGE DETECTION: Detect whether the voltage is overvoltage or undervoltage.

When the input voltage is 30 % lower than the calibrated voltage, the **UNDervOLTAGE** flashes on the screen.

When the input voltage is 30 % higher than the calibrated voltage, the **OVERVOLTAGE** flashes on the screen.

Note:

TVITIR120 does not support **VOLTAGE DETECTION**.

DEFECT: Defective pixels are pixels in a CCD or CMOS image sensor in digital cameras, in which the defective pixels fail to

sense light levels correctly. This series of camera supports defective pixel correction. Move the cursor to DEFECT and click Iris+ to enter the defective pixel correction interface.

LIVE DPC, and STATIC DPC are adjustable in this section.

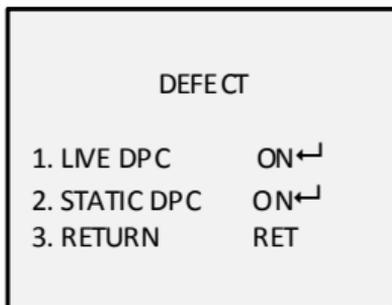


Figure 3. 11 Defect

LIVE DPC: Detects and corrects the dynamic or the real-time defective pixels occur during the using. ON, OFF and AUTO are selectable. The correction level from 0 to 255 is configurable if the LIVE DPC is set as ON, set it as OFF to disable the live defective pixel correction, and set it AUTO to detect and repair the defective pixels automatically.

STATIC DPC: Detects and corrects the static or the fixed defective pixels occurring during the using. ON and OFF are selectable. Set the STATIC DPC as ON, and click Iris+ to enter the STATIC DPC edit interface. Move the cursor to START, and click Iris+ to start correcting the defective pixels. Click Iris + when you see the message of **CLOSE THE IRIS THEN PRESS SETKEY** showing up on the screen.

3.3.9 ADJUST

In the Adjust sub-menu, you can configure the settings, including the sharpness, the image quality on monitor, and the LSC (lens shading compensation). Move the cursor to ADJUST and click Iris + to enter the adjust configuration interface.

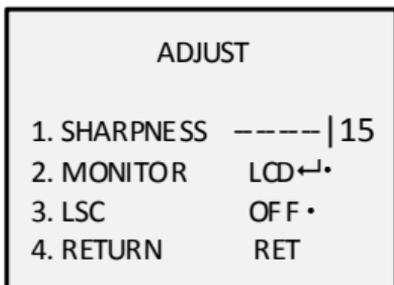


Figure 3. 12 Adjust

SHARPNESS: Sharpness determines the amount of detail an imaging system can reproduce. And you can adjust the sharpness from 0 to 15. The higher the value, the clearer and sharper the image appears.

MONITOR: Monitor CRT, and Monitor LCD are selectable.

CRT: The cathode ray tube is a fluorescent screen used to view images. You can define the black level from -30 to 30, the blue gain from 0 to 100, and the red gain from 0 to 100.

LCD: If liquid-crystal display (LCD) is selected. You can define the gamma, blue gain from 0 to 100, and red gain from 0 to 100.

Note:

Gamma is the name of a nonlinear operation used to code and decode luminance or tristimulus values in video or still image system.

LSC: Lens shading correction corrects the phenomenon that the image gets darkened or blurred on the periphery.

Set it as ON, move the cursor to **SCAN** and click Iris+ to correct the lens shading. Set it as OFF to disable the LSC.

3.3.10 RESET

Reset all the settings to the factory default.

3.3.11 EXIT

Move the cursor to EXIT and click Iris+ to exit the menu.

